




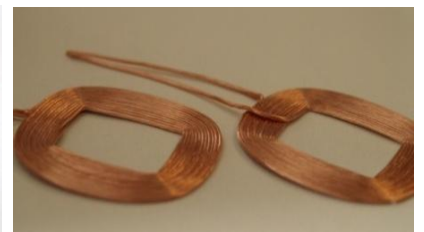
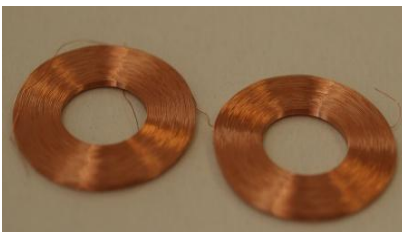
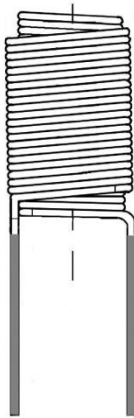
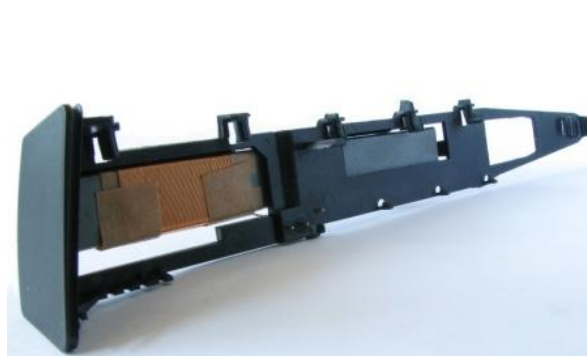
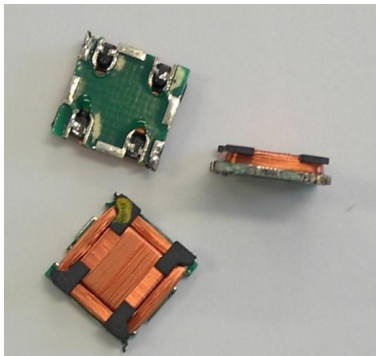





Technical data

Coils, antennas







Technical data		
the diameter of the winding wire (mm)	min.	0,06
	max.	2,50
number of turns	min	1 zwoj
winding direction		right
		left
winding		- single layer coils, - Multi layer coils - single section and multiple section coils wound on casings
tinning materials		- Pb free - Pb (customer on request)
winding wires		- Cu, CuL, CuLL, - CuAg, - special winding wires - litzwire - twisted pair cable - non-standard wire wound coils
pin shape		- axial terminal, - parallel terminals - special terminals - Through-Hole Technology THT - Surface Mounted Devices SMD
volume of production		- prototypes, - samples - production series
packaging		- packaging unit - packaging - blisterpack - packing in boxes,